
Assembly Instruction Sheet #IS-1099P32 For Style 1099P32

Required: Flathand screwid/ver, Philips screwid/ver, plient, wire outlore, wire elippers, electrical taps, safety glasses. Source: (24) E12 Candelates Base Butte 60W Maximum(Not Include). Secured: (24) E12 Candelates Butte Butte Butte (24) E12 Candelates (24) E12 Candelates (25) E12

ревоге пепточан.

▲ Warnings and Cautions
A Warnings and Cautions
Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.
These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.
Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool




Hardware Contents Crystal x10


#888\$ ₹ Canopy Chain Loop Wire nut Canopy Lock Ring Outlet Box Screw DESCRIPTION 8 8 QUANTITY 3 0 8 혍 꼆

> STEP 1— Install the Canopy Chain Loop and Nippi B- Attach the crossbar to the outlet box and the lock washer and the hex nut onto top end of the nipple. Do not tighten at this moment. A- Thread the nipple into the crossbar. Thread C— Thread the canopy chain loop onto the end of ighten until snug. secure with outlet box screws (not included). Hand

ceiling canopy over the canopy chain loop against the ceiling to determine the correct the nipple and hand tighten until snug. Place the the ceiling when held in place by the canopy lock onto the canopy chain loop. Adjust the nipple to position of thenipple. Thread the canopy lock ring llow the ceiling canopy to rest against

the crossbar. And then reinstall the crossba D- Remove the canopy lock ring from the canopy assembly to the outlet box. crossber assembly. Tight the hex nut above Unacrew outlet box acrews to remove the chain loop and remove the ceiling canopy.



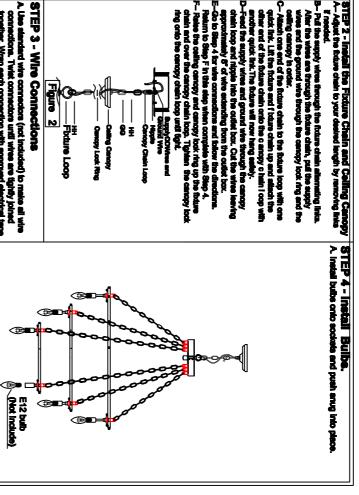

Black wire from outlet box (or Red) A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box. STEP 3 - Wire Connections from outlet box Bere, or Green Ground wire from outlet box White wire Bere, or Green Ground wire from outlet box on the Crossber Green Ground Screw White wire from fluture Ground wire from focure Ground wire from fixture from floture Stack wire

Figure 3

1 9 2