


ASSEMBLY AND INSTALLATION INSTRUCTIONS

SP34118

WARNING: TO AVOID RISK OF ELECTRIC SHOCK. BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring requirements.

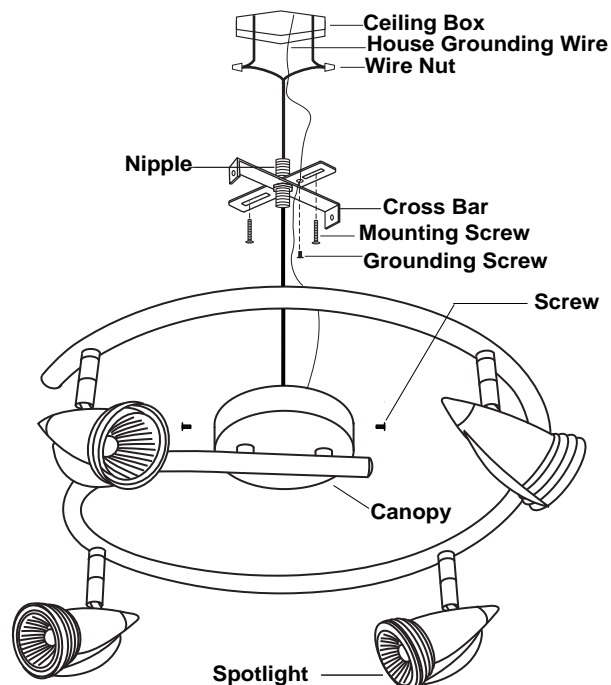

Installation Steps

1. Adjust the cross bar to the desired angle, and secure with the washer and the hex nut, attach the cross bar to the ceiling box by using 2 mounting screws.
2. Make wire connections with wire nuts:
 - The black wire from light to the black wire from outlet box.
 - The white wire from light to the white wire from outlet box.
 - Attach the grounding wire and house grounding wire to the cross bar with a green grounding screw.Carefully tuck wires back into the outlet box.
3. Attach the canopy to the cross bar by using screws.
4. Insert the halogen bulbs in the lamp holders. (Please do not exceed 50 watt)
5. Adjust the spotlight to the desired position.
6. Turn on the power at fuse or circuit box.