
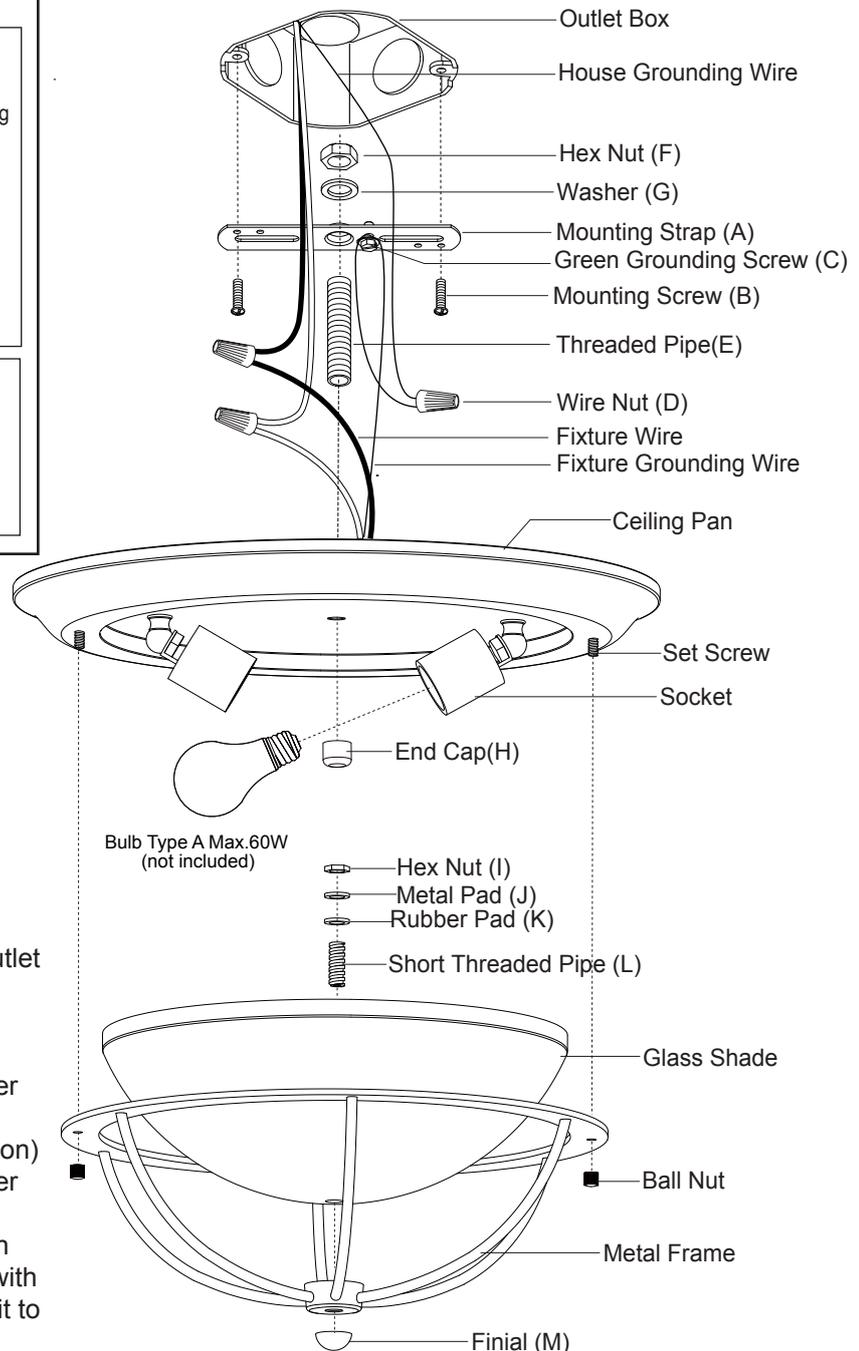


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0220

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

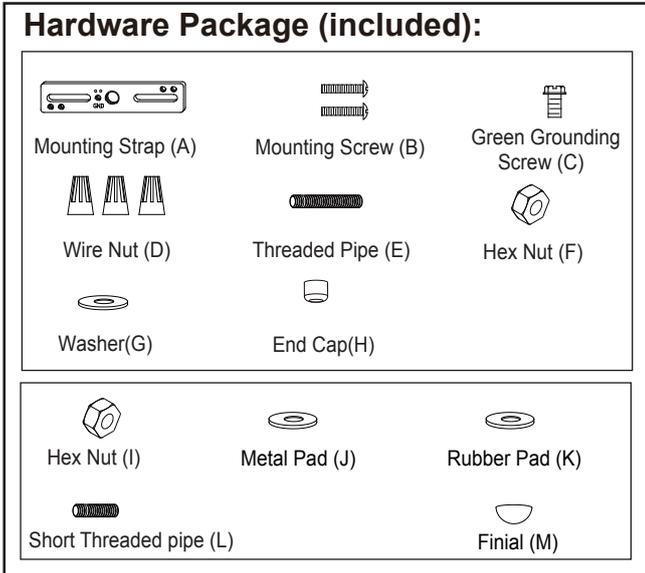

Installation Steps

Turn off the power at fuse or circuit box.

1. Attach the threaded pipe to the mounting strap, and then secure it with a washer and a hex nut.
2. Attach the mounting strap to the outlet box using two mounting screws.
3. Unscrew two ball nuts from ceiling pan.
4. Pull out the wires and grounding wire from the outlet box. Make wire connections using the wire nuts, as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap with the green grounding screw, and then connect it to the house grounding wire with the wire nut.
 Carefully put the wires back into the outlet box.

5. Attach the ceiling pan to the mounting strap by inserting threaded pipe into the center hole of the ceiling pan, and then screw the end cap to secure ceiling pan.
6. Install bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.
7. Lay the glass shade into metal frame carefully.

8. Slip the short threaded pipe down through the holes of glass shade and the metal frame, secure one end of the short threaded pipe with the finial, the other end with the rubber pad, the metal pad and the hex nut.

NOTE: Please don't over tighten, breakage could occur.

9. Attach the metal frame up to the ceiling pan by inserting two set screws, and then secure them with two ball nuts.

Turn on the power at fuse or circuit box.


The following parts are available for re-order if damaged or missing.


Spare Parts List:

 Mounting Strap (A)	 Mounting Screw (B)	 Green Grounding Screw (C)	 Wire Nut (D)
 Threaded Pipe (E)	 Hex Nut (F)	 Washer (G)	 End Cap (H)

← Assembly Kit 5498MM (1 SET)


Ball Nut 5504BB (2 PCS)

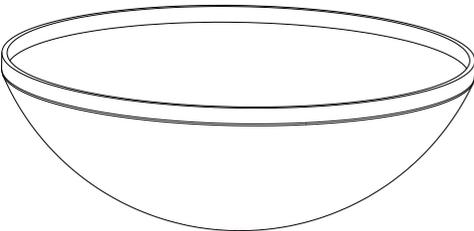
Glass Shade 9802C (1 PC)

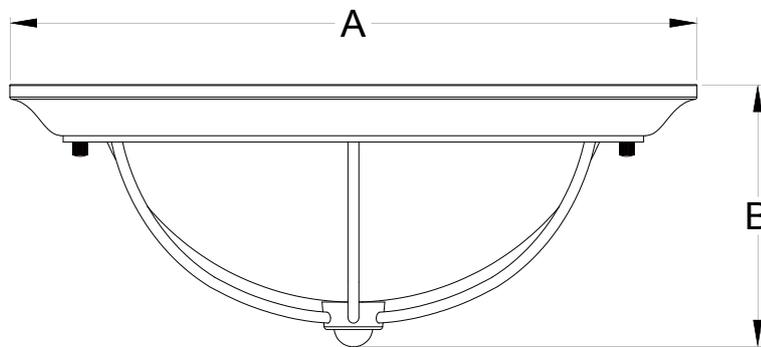

A: 15" B: 5-3/4"