
## ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0288

## WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.

2. READ AND SAVE THESE INSTRUCTIONS.

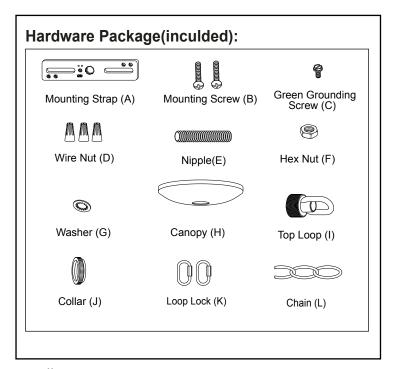


**Installation Steps** 

## Turn off the power at fuse or circuit box.

- 1. Attach nipple to the mounting strap, then secure it with a washer and hex nut.
- 2. Attach the mounting strap to the outlet box by using two mounting screws.
- 3. Secure the top loop to nipple.
- 4. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain, collar and canopy.
- 5. Connect one end of the chain with the loop by using a loop lock.
- 6. Connect the other end of the chain with the top loop by using another loop lock.
- 7. Thread the fixture wire and fixture grounding wire through the top loop, nipple and mounting strap.
- 8. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
  - ---The smooth wire (marked) from the fixture to the black wire from the power source.
  - ---The ridged wire (unmarked) from the fixture to the white wire from the power source.
  - ---Attach the fixture grounding wire to the mounting strap with the green grounding screw.

    Then connect it to the house grounding wire with a wire nut.


Carefully put the wires back into the outlet box.

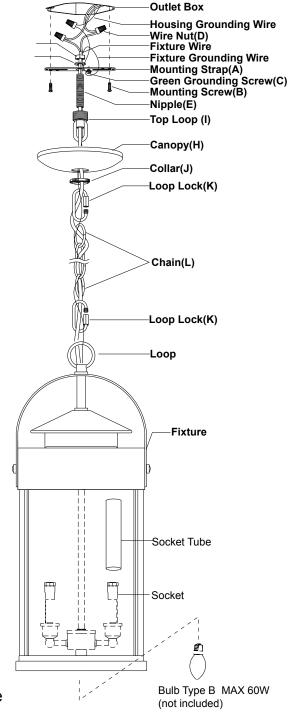


- 9. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
- 10. Attach the socket tube onto the socket to cover the socket completly.
- 11. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
- 12. Turn on the power at the main fuse or circuit breaker box.

## Turn off the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

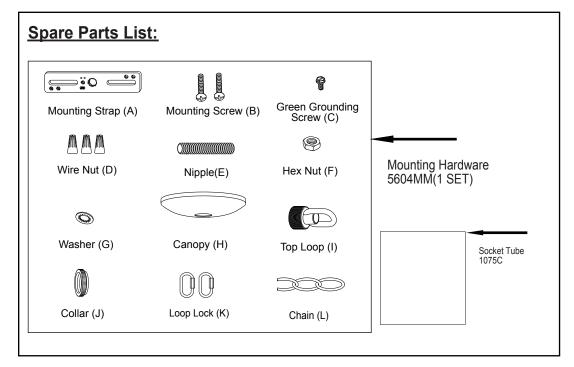



A: 10" B: 23-3/4"

